


Manual pumps oil and similar

singleacting

doubleacting

Manual pump for oil and allied products. Single-acting and VITON seals. Double-acting and NBR seals. The telescopic suction tube enables direct application on containers of different capacities. Suitable for delivering low-viscosity oil.

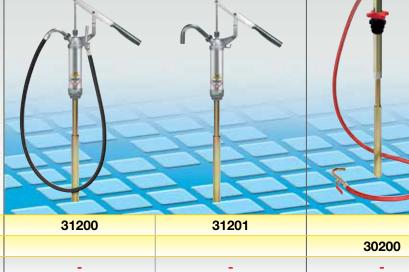

		The second secon		The second secon	
Article with seals in	VITON	31200	31201		
Article with seals in	NBR			30200	
Tank capacity	litres	-	-	-	
Suitable for drums	kg	50 - 220	50 - 220	50 - 220	
Delivery hose length	m	2	-	2	
Suction tube length	m	0,7 - 1,04	0,7 - 1,04	0,7 - 1,04	
Quantity delivered for complete cycle of the lever	g	240	240	220	
Max oil density delivered	SAE	130	130	240	
Drum clamping ring	Art.	-	-	38044	
Trolley	Art.	-	-	-	
Antisplash funnel	Art.	-	-	-	
Packing 😭	N° - m³	1 - 0,016	1 - 0,016	1 - 0,016	
Weight	kg	4,2	4,0	4,4	
Dimensions (A - B - C)	cm	5,7 - 5,7 - 138	5,7 - 5,7 - 138	3,8 - 3,8 - 115	

Caution: do not use with flammable or corrosive liquids





