

Ratio **60:1**



Art. 63074



Art. 63095

Air-operated pumps suitable for dispensing all types of grease short and long distances. **Particularly suitable for centralized dispensing systems.**

Particularly recommended for specific needs requiring a higher quantity of grease and higher pressure.


Art. 63074 Air-operated grease pump ratio 60:1
for 50/60 kg trade drums
(length of suction tube 740 mm)

N° 1 packing m^3 0,020 kg 7,4

Art. 63095 Air-operated grease pump ratio 60:1
for 180/220 kg trade drums
(length of suction tube 940 mm)


N° 1 packing m^3 0,020 kg 8,2

The suction tube is realized with special heat-treated pressed steel couplings, i.e. without seals in order to eliminate eventual wear.

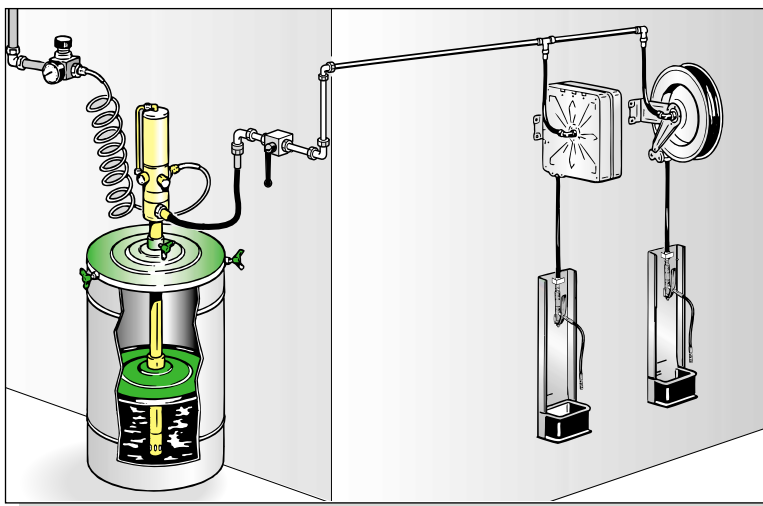

Single- and Double-acting	see page 50-51
Compression ratio	see page 52
Relative and real capacity	see page 53

Overall dimensions

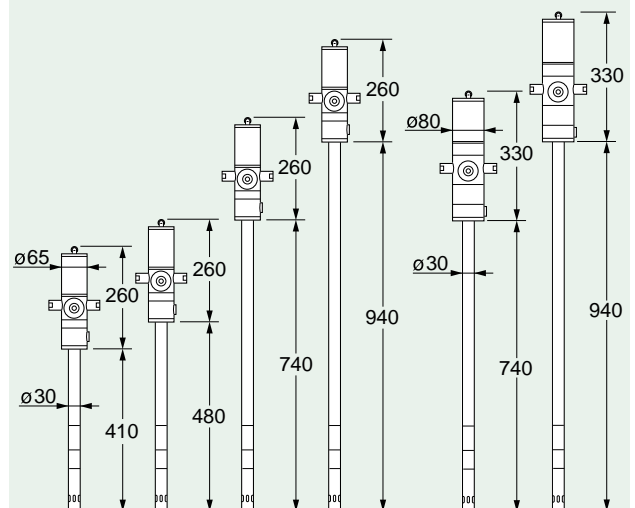

art. 62041-62048-62074-62095

art. 63074-63095