




tank 13 lt

Automatic charger



Art. 52013

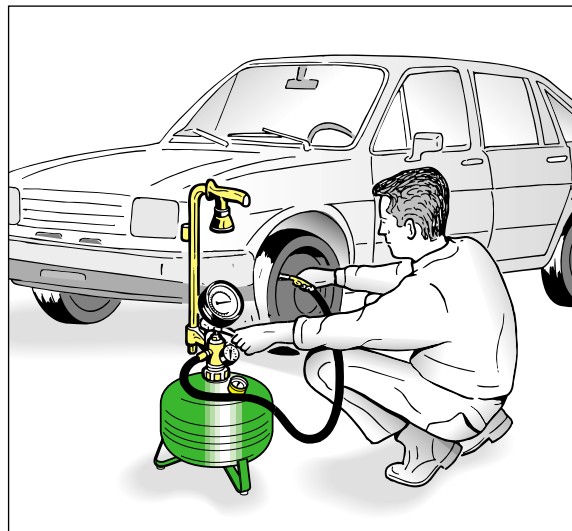


Tyre-inflator suitable for checking and restoring the pressure with all types of tyres. The 13-litre tank is equipped with automatic charging in order to be always ready for use. Indispensable and handy in filling stations.

Art. 52013 Automatic-charging type-approved tyre inflator with type-approved manometer \varnothing 80 mm complete with automatic charger art. 52020

N° 1 packing m^3 0,088 kg 8,8

Article	52013
Tank capacity	13 lt
Max. tank pressure	10 bar
Calibrated safety valve	10 bar
Manometer \varnothing 50 tank pressure	0-10 bar
Max. working pressure	7 bar
Manometer \varnothing 80 working pressure	Type-approved to 0-10bar
Working temperature	-20° +60°C
Double head inflating hose	1,2 metres

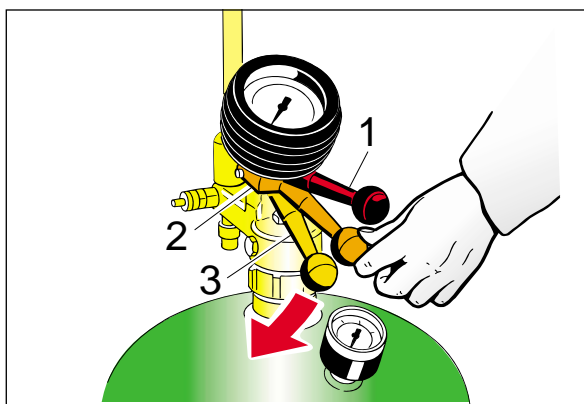

The inflating and deflating operations involve a single three-position lever:
 1) idle
 2) deflation
 3) inflation




Art. 52020

Art. 52020 Automatic charger for tyre inflators


To charge or recharge the tyre inflator, just place it on automatic charger installed as shown opposite.

Automatically filled with air, they are always ready for use.

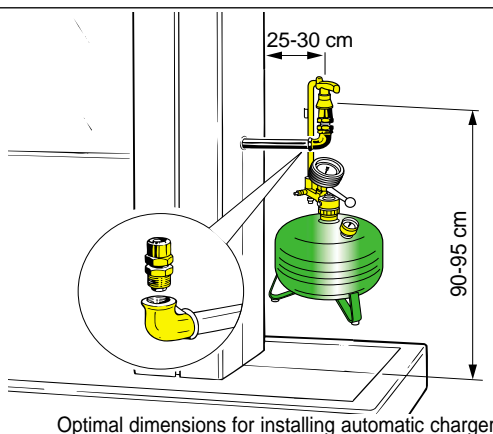

Optimal dimensions for installing automatic charger

Overall dimensions



art. 52013