

**Pressure sprayers** suitable for the **non-toxic** spraying of detergent liquids, low density lubrication oils and similar, for washing motors vehicles, grafting, lubricating, distributing mould release oils, etc.  
 Filled to 3/4 their capacity with the chosen liquid and pressurized with air at 6-8 bar, they work autonomously without requiring continuous connection to the compressed-air line.

**Art. 22017 Portable pressure sprayers with 16 litres tank**  
 Equipped with level gauge  
 Comes with antislash funnel (art. 24891).

N° 1 packing  $m^3$  0,080 kg 9,8

**Art. 22024 Trolley pressure sprayers with 24 litre tank**  
 Equipped with level gauge  
 Comes with antislash funnel (art. 24891).

N° 1 packing  $m^3$  0,090 kg 13

Article	22017	22024
Tank capacity	16 lt	24 lt
Delivery hose length	5 m	5 m
Max. working pressure	10 bar	10 bar
Gun length	0,65 m	0,65 m
Safety valve	10 bar	10 bar

**IMPORTANT:** Do not use flammable or corrosive liquids.

Removable cleaning filter

Adjustable nozzle

The flowrate of the pressure sprayers nozzle (i.e. the quantity of liquid coming out per minute) is approximately 1-1.2 litres per minute.

The nozzle flowrate can vary according to the following factors:

- according to the pressure of the air feeding the atomizer,
- according to the temperature
- according to the viscosity of the liquid used.

**Art. 24891**  
**Antislash funnel**

Funnel with antislash rim to prevent the liquid from spilling out when filling the tank.


**Overall dimensions**

**art. 22017**


**art. 22024**




Example of use with antioxidant, oil, diesel oil on particular mechanisms.

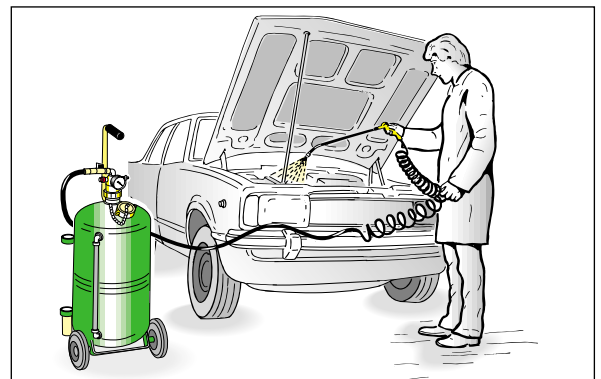

Example of use with detergent for washing engines.

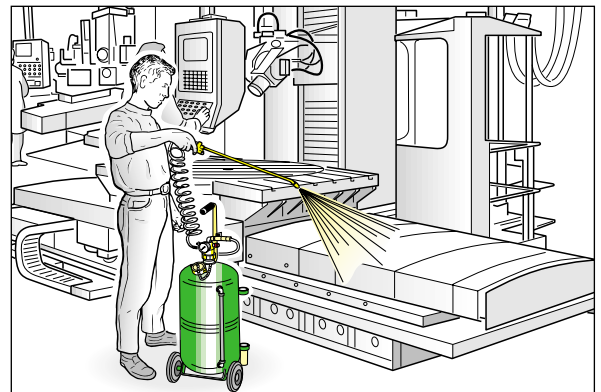

Example of use with detergents or protectives for machine tools

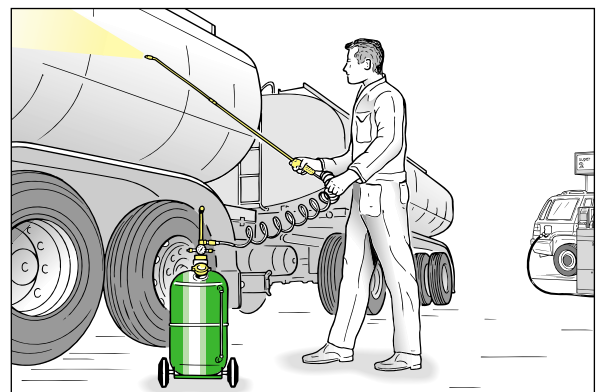

Example of use with detergent for washing cars and trucks.