










Air-operated pumps for DISTRIBUTION

Ratio **5:1** Flow rate **18 l/min**

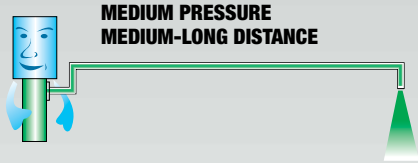

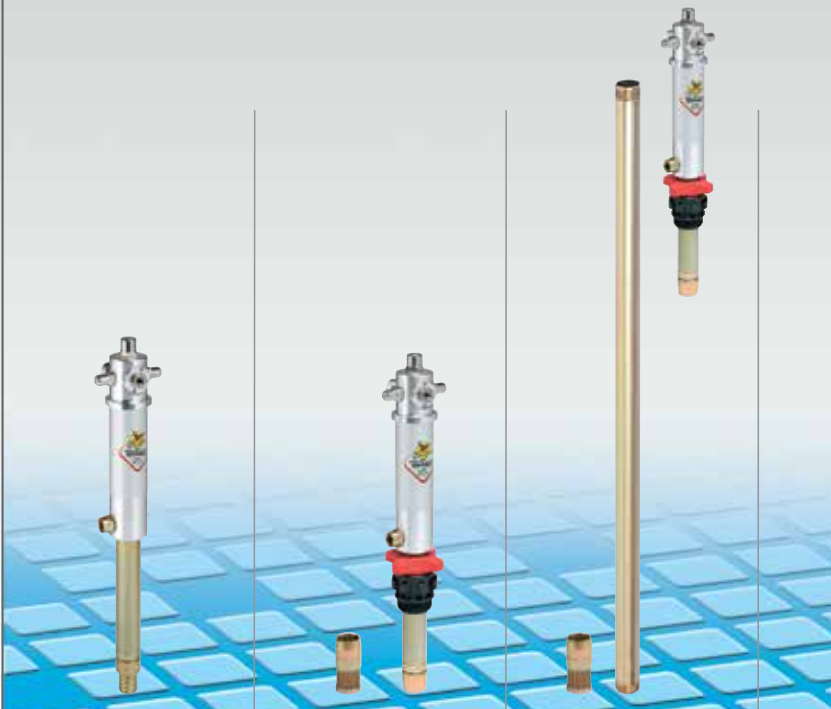Series 650 air-operated double-acting pumps for medium distance oil distribution. Ideal for also distributing high viscosity oil. The double action guarantees the delivery of a continuous and constant flow, ideal for all installations, excellent for centralised distribution systems. The wall-mounted version of these pumps, mounted on wall or in a fixed position by means of the special accessories (refer to page 107), enables numerous uses through the application of modular extensions (refer to page 112).



Article with seals in		NBR	36060	36061	36063
Article with seals in		NBR			
Compatible fluids			Medium/high-viscosity oil		
Suction tube upper body			Aluminium		
Suction tube			Carbon steel		
Air inlet connection	bsp		F 1/4" G	F 1/4" G	F 1/4" G
Fluid outlet connection	bsp		F 1/2" G	F 1/2" G	F 1/2" G
Air working pressure	bar		6 - 8	6 - 8	6 - 8
Average air consumption	l/min		350	350	350
Noise level	dB		81	81	81
Max deliverable oil viscosity	SAE		240	240	240
Bung adaptor			-	standard	standard
Suitable for drums or tanks					
Packing	 N° - m ³		1 - 0,01	1 - 0,01	1 - 0,02
Weight	 Kg		4,7	5,2	7,2
Dimensions (A - B - C)		cm	34,5 - 27 - 4,2	34,5 - 27 - 4,2	34,5 - 125 - 4,2

PUMP AIR FEEDING PRESSURE

A A 8 bar 116 psi

B B 6 bar 87 psi

C C 4 bar 58 psi

