
## 166

# PAAS

#### AIR-OPERATED GREASE PUMPS

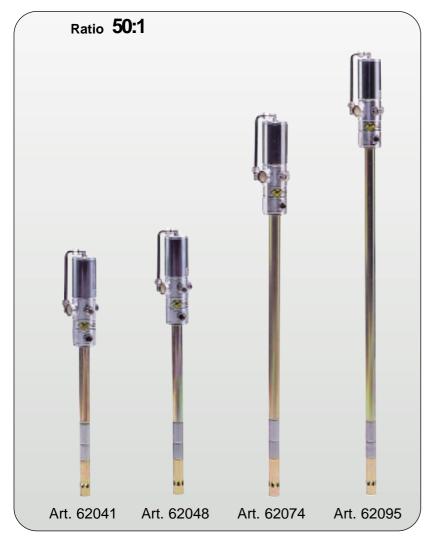

**Air-operated pumps** for dispensing all types of grease short and long distance, for greasing at high pressures.

A wide range of models facilitates choice for application in kit for installation in centralized systems.

### Art. 62041 Air-operated grease pump ratio 50:1

for 16/20 kg trade drums (length of suction tube 410 mm)

N° 1 packing m <sup>3</sup> 0,010 g kg 4,6

#### Art. 62048 Air-operated grease pump ratio 50:1

for 20/30 kg trade drums (length of suction tube 480 mm)

N° 1 packing m <sup>3</sup> 0,010 kg 4,8

#### Art. 62074 Air-operated grease pump ratio 50:1


for 50/60 kg trade drums (length of suction tube 740 mm)

N° 1 packing m <sup>3</sup> 0,020 kg 6,1

#### Art. 62095 Air-operated grease pump ratio 50:1

for 180/220 kg trade drums (length of suction tube 940 mm)

**№** 1 packing m <sup>3</sup> 0,020 kg 6,7

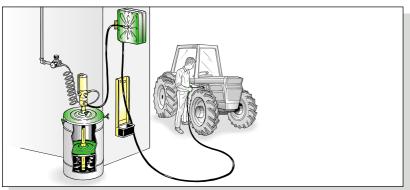

Equipped with filter at air inlet to motor and a filter in the suction tube for drawing clean grease. The pumps are also equipped with a double valve that facilitates the continuous delivery of grease sucked, thus preventing any stoppages due to any impurities.

Article	62041	62048	62074	62095	63074	63095
Compression						
ratio	50:1	50:1	50:1	50:1	60:1	60:1
Air inlet connection	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G
Grease delivery connection	F 3/8" G	F 3/8" G	F 3/8" G	F 3/8" G	F 3/8" G	F 3/8" G
Working pressure	6 - 8 bar	6 - 8 bar	6 - 8 bar			
Max. pressure	8 bar	8 bar	8 bar	8 bar	8 bar	8 bar
Air consumption	130 lt/min	130 lt/min	130 lt/min	130 lt/min	240 lt/min	240 lt/min
Capacity (free outlet at 6 bar						
self-levelling grease 20°C)	1500 g/min	1500 g/min	1500 g/min	1500 g/min	1900 g/min	1900 g/min
Noise-level	81 dB	81 dB	81 dB	81 dB	81 dB	81 dB
Suitable for drums	16 - 20 Kg	20 - 30 kg	50 - 60 kg	180 - 220 kg	50 - 60 kg	180 - 220 kg
Length suction tube	410 mm	480 mm	740 mm	940 mm	740 mm	940 mm
Diameter suction tube	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm